

03.2021

G2 SILVERTEX®

Composition
Vinyl / Urethane Topcoat

Durability
>300.000 Martindale

Finish
Impermeability, antibacterial protection, antifungal, anti-stain.

UV-resistance
1.000 hours, blue wool scale

Fire Test
ECE Regulation No.118:03 (R118.02 Annexes 6, 7 & 8) | EU: EN 1021 Part 1 & 2 | US: CAL TB 117-2013, Section E | ES: UNE 23.727-90 1R/M.2 | FR: NF P 92-503/M2 | DE: DIN 4102 B2 | IT: UNI 9175 (1987) / UNI 9175/FA1 (1994) Classe 1.IM (UNO I EMME) | AT: ÖNORM B 3825, Gruppe 1 - Schwerbrennbares Verhalten | AT: ÖNORM A 3800 Teil 1, Qualmbil-dungsklasse Q1 - schwachqualmend
IMO FTP 2010 Code MSC.307 (88) Part 8 3.1 & 3.2 | US: FMVSS 302 | US: FAR 25/853 (MED) Marine Equipment Directive (in its current valid version) | EN 712:2006+A1:2007 - Safety of Toys - Parte 2: Flammability1

Warranty
5 years

Maintenance and cleaning



G2 SUNBRELLA® NATTÉ

Composition
100% Sunbrella® Acrylic

Durability
30.000 Martindale

Finish
Water-repellent, stain-proof and mould repellent

UV-resistance
1.000 hours, 4/5 (Class/5, ISO 105 B04) | 8, (ISO 105 B02)

Pilling
4/5 (ISO 12945 - 2)

Fire Test
NP EN 1021-1 class P-c, Non- ignition | NFPA 260- class I | California Technical Bulletin 117-203- Section 1 | BS 5852- part 1

Warranty
5 years

Maintenance and cleaning



G2 CREVIN VITA

Composition
57%PP, 38%PES, 5%PU

Durability
60.000 Martindale

Color fastness to light
1.000 hours, (EN ISO 105-B04:1997)

Pilling
4/5 (EN ISO 12945/2:2000)

Fire Test
BS5852 Source 0 | EN1021-Part 1:2006 | CAL TB 117:2013 | NFPA 260:2013

Warranty
5 years

Maintenance and cleaning



G3 CREVIN FIJI

Composition
81%PP, 16%PES, 4%PU

Durability
30.000 Martindale

Color fastness to light
1.000 hours (EN ISO 105-B04:1997)

Pilling
4/5 (EN ISO 12945/2:2000)

Fire Test
BS5852 Source 0 | EN1021-Part 1:2006 | CAL TB 117:2013 | NFPA 260:2013

Warranty
5 years

Maintenance and cleaning



G3 CREVIN BORA BORA

Composition
84%PP, 16%PES

Durability
>100.000 Martindale

Color fastness to light
1.000 hours (EN ISO 105-B04:1997)

Pilling
5 (EN ISO 12945/2:2000)

Fire Test
BS5852 Source 0 | EN1021-Part 1:2006 | CAL TB 117:2013 | NFPA 260:2013

Warranty
5 years

Maintenance and cleaning



G3 IMATEX STINGRAY

Composition
63%PP, 37%PC

Durability
60.000 Martindale

Color fastness to light
7/8 (EN ISO 105-B02)

Pilling
4 (EN ISO 12945-2)

Fire Test
Cigarette test BS 5852 Source 0 | Technical Bulletin 117-2013

Warranty
5 years

Maintenance and cleaning



G3 SERGE FERRARI

Composition
63%PP, 37%PC

Durability
>50 000 Martindale

Finish
Mould resistance

Color fastness to light
4 to 700 hours (ASTMG154: UVA340)

Fire Test
IMO MSC.307(88) (2010FTP Code) Appendix 1 Part 8

Warranty
5 years

Maintenance and cleaning



G4 KVADRAT PATIO

Composition
100% Trevira CS

Durability
50.000 Martindale

Finish
Fluorocarbon-free water repellent

Color fastness to light
7/8 (ISO)

Pilling
4/5 (ISO 1-5)

Fire Test
BS 5852 Crib 5 | BS 5852 ignition source 3 | IMO FTP Code 2010 Part 8 | NF D 60 013 | NF P 92 507 M1 | UNI 9175 1IM | UNI 9177 Classe 1 | US Cal. Bull. 117-2013 | DIN 4102 B1 | EN 1021-1/2 | ASTM E84 Class A | AS/NZS 3837 class 1

Warranty
10 years

Maintenance and cleaning



G4 SUNBRELLA® LOPI

Composition
100% Sunbrella® Acrylic

Durability
90.000 Martindale

Finish
Water-repellent, stain-proof and mould repellent

Color fastness to light
1.000 hours, 4/5 (Class/5, ISO 105 B04) | 8, (ISO 105 B02)

Pilling
5 (ISO 12945 - 2)

Fire Test
NP EN 1021-1 class P-c, Non- ignition | NFPA 260- class I | California Technical Bulletin 117-203- Section 1 | BS 5852- part 1

Warranty
5 years

Maintenance and cleaning



Outdoor Fabrics

G2

SPRADLING SILVERTEX®



G2

SPRADLING SILVERTEX®



G2

SUNBRELLA® NATTÉ



G2

SUNBRELLA® NATTÉ




G2

CREVIN VITA




G3

CREVIN FIJI

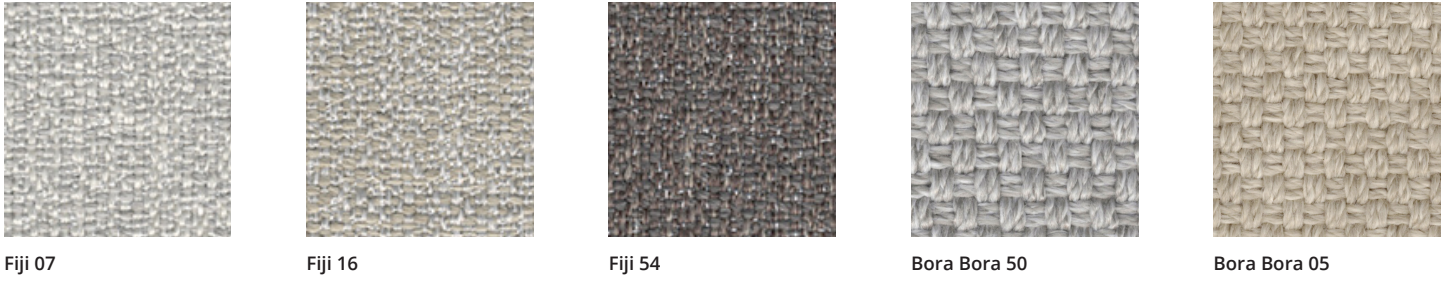


G3

IMATEX STINGRAY

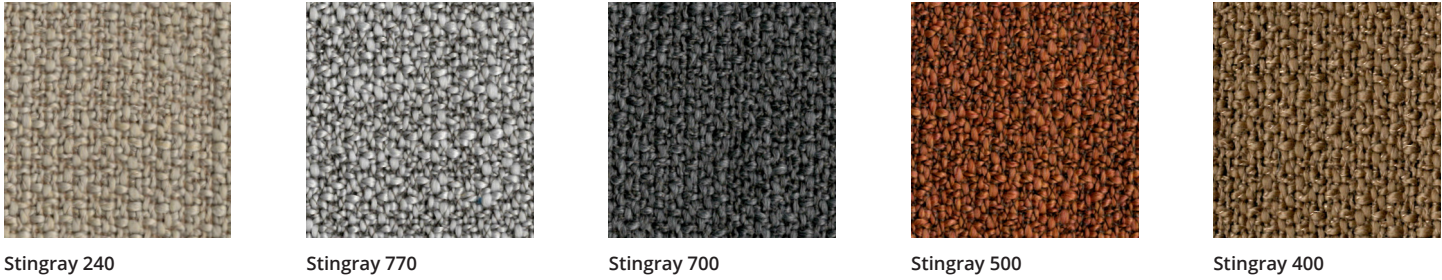

G3

SERGE FERRARI BATYLINE

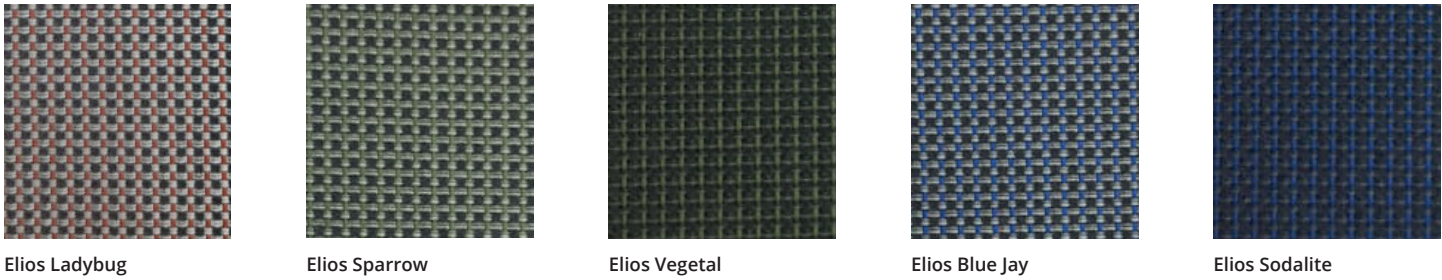

G4

KVADRAT PATIO



G5

SUNBRELLA® LOPI

